



RETAIL LEAFLET



SCAN TO
VISIT
OUR
WEBSITE




EV SERIES

EV CHARGER THE ECOLOGICAL TRANSITION IS ON !

Time to update your home or company parking lot by integrating EV charging solution !

Meet our durable, weatherproof, type 2 wall mounted stylised with a high-end professional finish that blends in and complements any home exterior or garage interior. The lockable, ergonomically-designed charging gun can be stored either on the right or left side of the unit based on your preference/garage configuration.

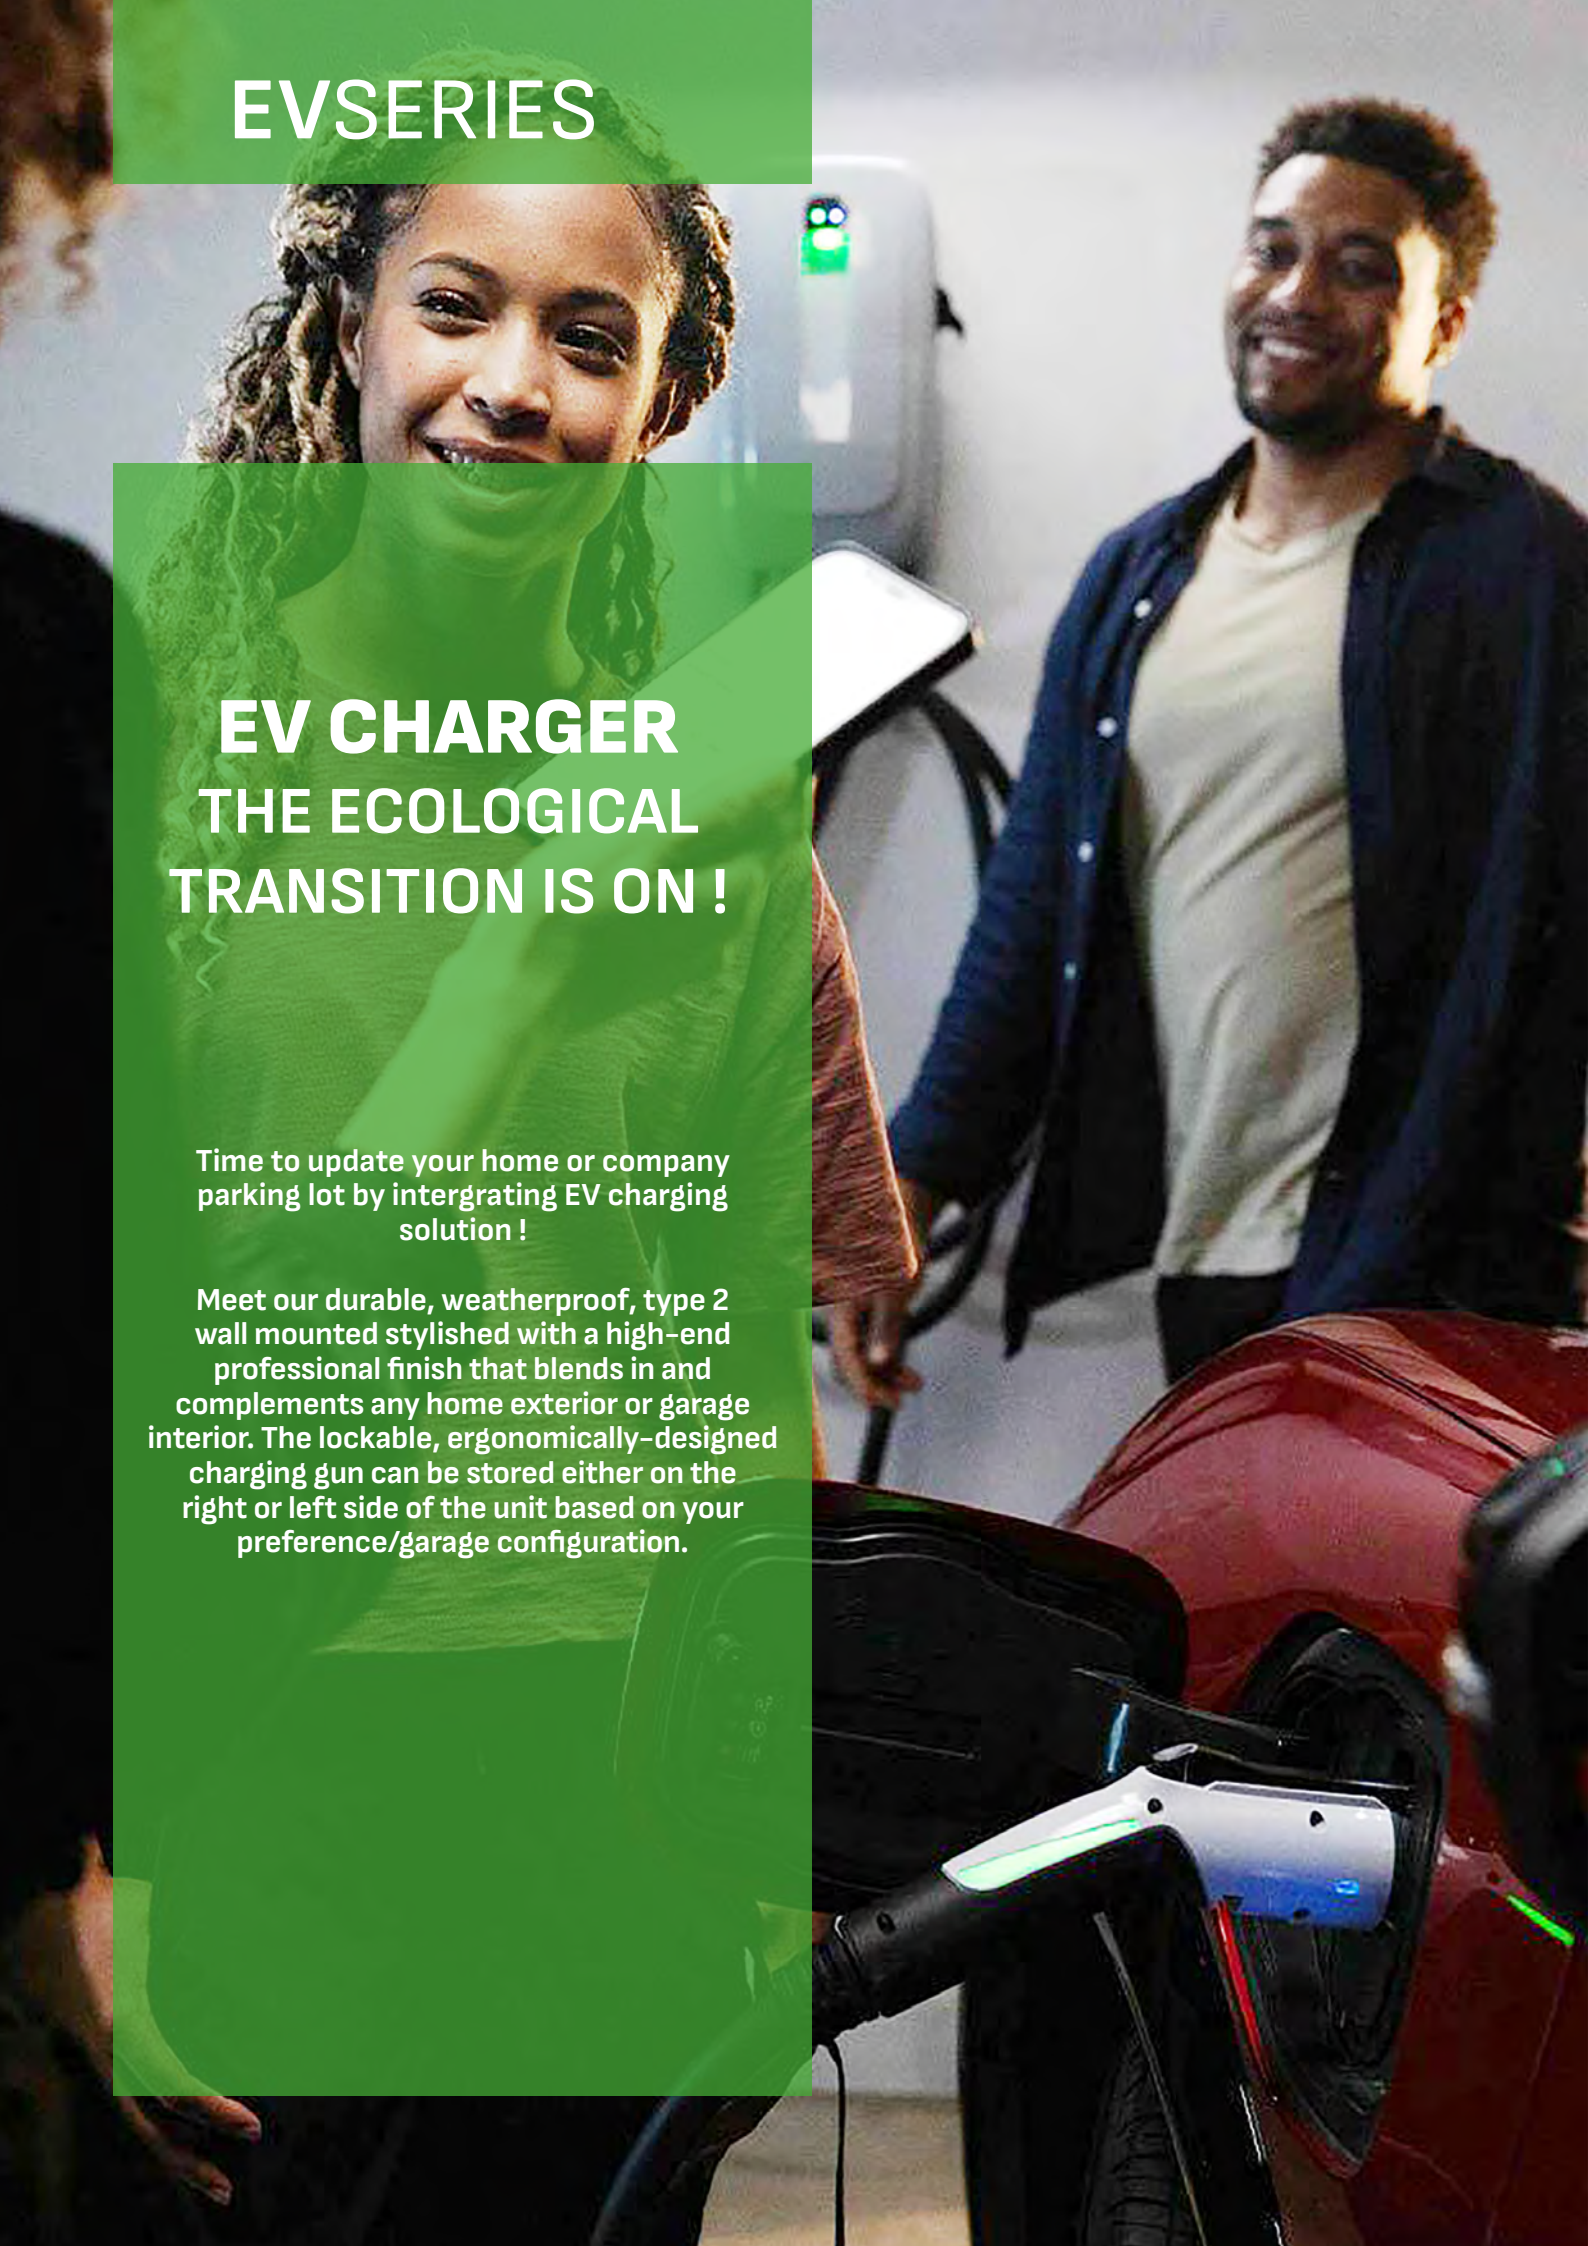

CHARGER

ELECTRIC/HYBRID VEHICLES

SEV455

- Input AC 220-240V, 50-60 Hz
- Single phase 32 Amp
- Rated output power : 7,4 kW
- Wifi connected
- Charge cable length : 5m
- Operating temperature : -30° C to +50° C
- Connector type : Type 2
- Installation location : indoor/outdoor
- Installation type : Hardwired*
- Power Wiring : 3 wire single phase L, N plus ground

* Hardwired installation requires a certified electrician and compliance with country electrical guidelines





CONNECT & CHARGE TWO BATTERIES

Use the SC348 2-bank battery charger for all your leisure vehicles — boats, RVs, personal watercraft, and more.

INTELLIGENT CHARGING

This water-resistant 2-bank charger automatically detects connected batteries and charges them sequentially.

Its microprocessor management makes charging easy, it automatically adjusts the amperage rate to charge and maintain batteries correctly. It also features reverse polarity protection to prevent damage to the battery when the clamps are reversed.



BATTERY CHARGER & MAINTAINER SC348



TECHNICAL INFORMATION




MODEL	SC348
Part number	94065348C
Voltage (DC)	12 V
Nominal AC voltage	230V AC - 50 Hz
Max. charging current	15 A
IP rating	IP 65
Battery type	Compatible with standard, AGM, gel, and deep-cycle batteries
Output cable (cm) (From enclosure to clamp end)	180 cm
Operating temperature	-20° to +50° C



Water-resistant construction protects against weather and jetting water.

12V15A

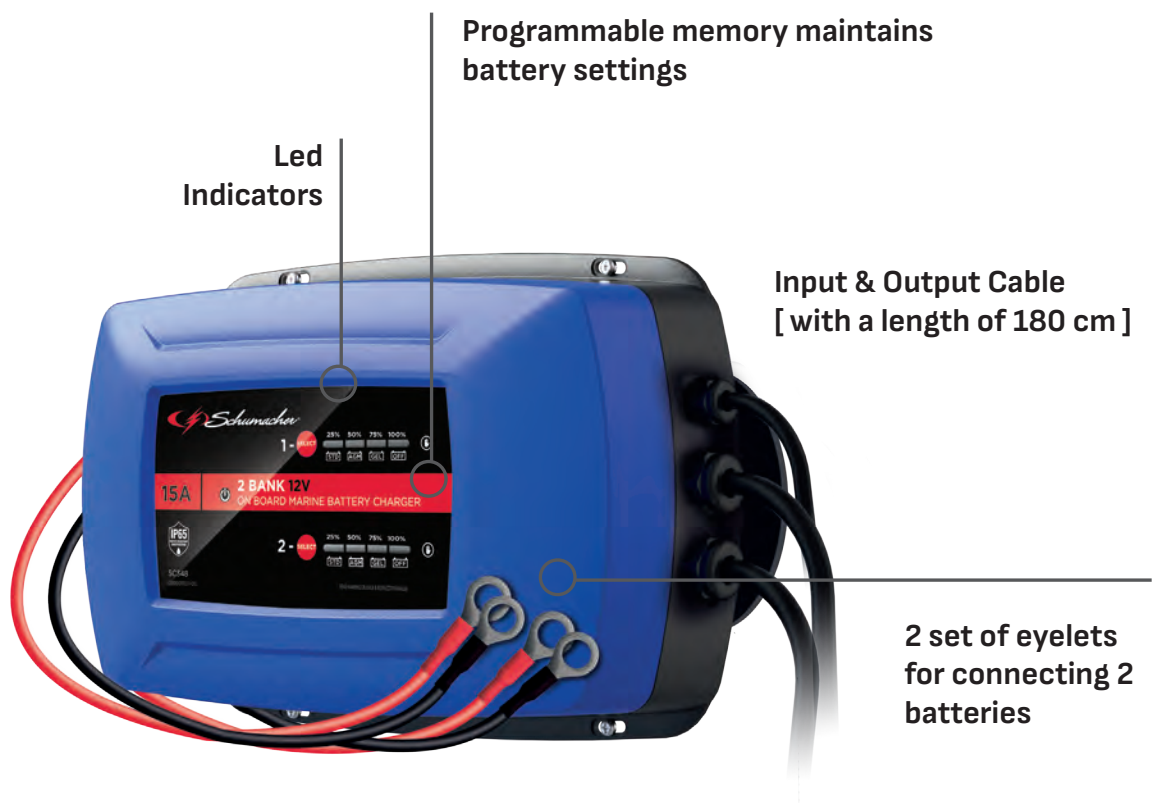

RUGGED

////// BY SCHUMACHER™

WORRY-FREE CHARGING MAINTAIN ALL SEASON

The RUGGED battery chargers range charge and maintain AGM, Standard, Gel, Calcium, Start n' Stop, Lithium batteries of 6 V (SPX 457) or 12 V. The chargers are equipped with advanced patented technologies to quickly, efficiently and safely charge your motorcycle, lawnmower, car and any other vehicle equipped with a 6 V or 12 V battery.

The RUGGED SPX series chargers are compact, lightweight and easy to use, making them a practical solution. Their non-slip bumpers protect them in case of a fall.



BATTERY CHARGERS & MAINTAINERS

SPX RANGE



SPX457 1A



SPX458 3A



SPX459 6A



SPX460 10A

i TECHNICAL INFORMATION



MODEL	SPX 457	SPX 458	SPX 459	SPX 460
Part number	94065457*	94065458*	94065459*	94065460*
	* Add letter plug type PLUG EU = C PLUG UK = G PLUG AU = I			
Voltage (DC)	6/12 V	12 V	12 V	12 V
Nominal AC voltage	230V AC - 50 Hz			
Max. charging current	1 A	3 A	6 A	10 A
IP rating	IP 66	IP 54	/	/
Battery type	Lead-Acid & Lithium	Lead-Acid & Lithium	Lead-Acid & Lithium	Lead-Acid & Lithium
Output cable (cm) (From enclosure to clamp end)	191	191	195	195
Operating temperature	-20° to +50° C			

12V6A

Supplied with clamps and eyelets for optimal and secure connection.



Hook attachment

Fully automatic and safety shut-off

Protective bumpers

RUGGED

////////// BY SCHUMACHER™

HIGH PERFORMANCE LITHIUM TECHNOLOGY

Rugged Lithium Portable Power Pack and Jump Starter.

Schumacher's Rugged Lithium Portable Power Pack and Jump Starter features a robust new design with powerful performance, giving users the ultimate in versatility. With this powerful range, users can jump start a vehicle, charge their devices, and light up their work area.



BATTERY JUMP STARTERS & POWERBANK SBX RANGE



TECHNICAL INFORMATION

MODEL	SBX 461	SBX 462	SBX 463	SBX 464
Part number	94065461	94065462	94065463	94065464
Voltage (DC)	12 V	12 V	12 V	12 V
Max Amps	1000 A	1500 A	2000 A	2500 A
Cable length	0,62 m	0,62 m	0,62 m	0,62 m
IP rating	IP 64	IP 64	IP 64	IP 64
Input USB rating	USB-C	USB-C	USB-C	USB-C
Output USB power	2,4 A	2,4 A	2,4 A	2,4 A
Internal battery type	Li-ion Polymer			



Clamps

12V 2000A



The Schumacher logo, featuring a stylized lightning bolt icon to the left of the brand name "Schumacher" in a white, cursive font, set against a dark background.

Schumacher®

SL471 ALWAYS BY YOUR SIDE WHEN YOU NEED IT !

The SL471 lithium booster features Schumacher's patented 4-cell technology for increased instantaneous power.

It can perform multiple starts on a single charge and is protected against reverse polarity, short circuit, overheating, overcharging, overvoltage and sparking.

The 2.4A USB port ensures a fast charge 2x more powerful than a standard USB charger for your smartphones, tablets, cameras and other electronic devices.

BATTERY JUMP STARTERS & POWERBANK SL471



TECHNICAL INFORMATION

MODEL	SL471
Part number	94065471
Voltage	12 V
Max amps	600 A
Wireless charge	NO
Input USB charge	USB-C
Output USB power	2,4 A
Cable length	0,45 m
Cable cross section	5,27 mm ² (10 GA)
Led light	Yes

12V600A



The Schumacher logo, featuring a stylized lightning bolt icon followed by the brand name "Schumacher" in a white, cursive script font, set against a dark grey background.

Schumacher®

PORTABLE ENERGY, THE FREEDOM OF LIVING OUTSIDE

The Schumacher Power Inverter allows you to power all 230V AC electric equipment (house, camping, marine, office equipment) by using 12V DC « vehicle » batteries.



BATTERY POWER INVERTER

INV RANGE



i TECHNICAL INFORMATION

MODEL	INV 150	INV 300	INV 600	INV 1000
Part number	S7000100	S7001101	S7002402	S7003303
Voltage (DC)	12 V	12 V	12 V	12 V
AC output voltage	220/240V - 60 Hz			
DC input voltage	10 V to 15 V			
Continous amps	150 W	300 W	600 W	1000 W
Peak amps	300 W	600 W	1200 W	2000 W
Sine wave	Modified			

12V600W



Smart Cooling fan
High protections


SL184 SLIM BLACK WORKLIGHT

Ultra-bright directional lighting,
360-degree swivel, tilt and dimmer.

16 Superbright SMD LED

120 min Life

Soft touch
rubberized
casing

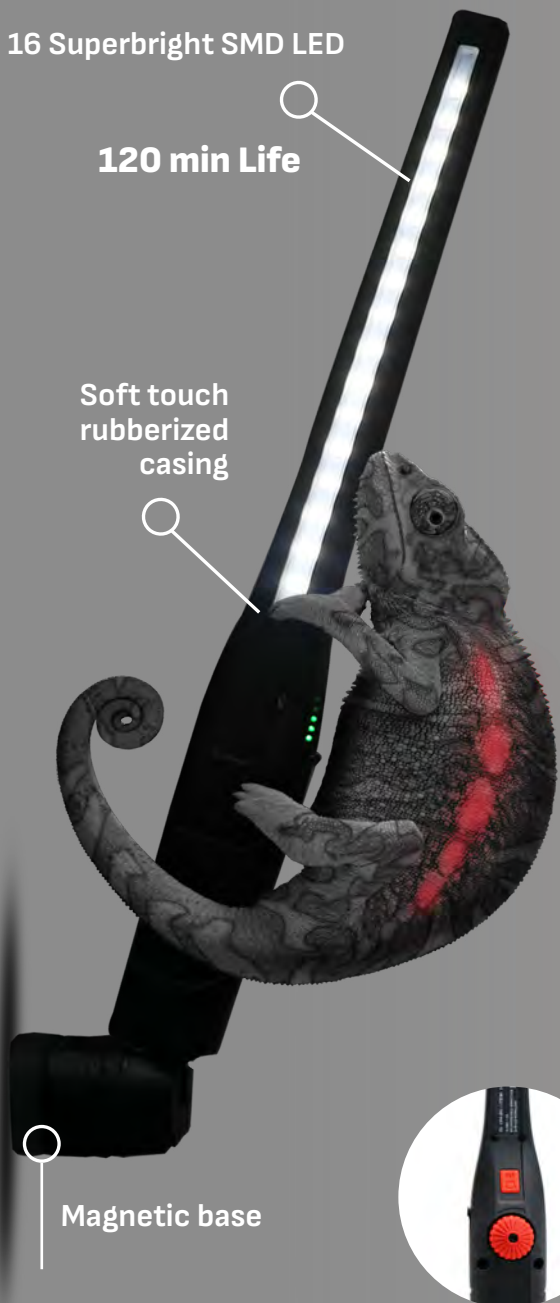

Magnetic base



SL 879U

FLOOR LAMP

- Stepless dimmer mode
- Battery level indicator LEDs
- Floor Lamp
- Aluminum body
- Rechargeable Lithium-Ion battery:
7.4V - 4Ah

TECHNICAL INFORMATION


MODEL	SL 184	SL879 U
Part number	94500852	94500879
Lumens	600	1200
Technology	16 SMD	15W COB LED
Lithium - Ion (Battery capacity)	2600 mAh	4000 mAh
Micro USB charging port & cable	✓	x
IP rating	IP 54	IP 44

BATTERY TESTER

XP200 & BT55

XP200

TESTER MULTIFONCTION

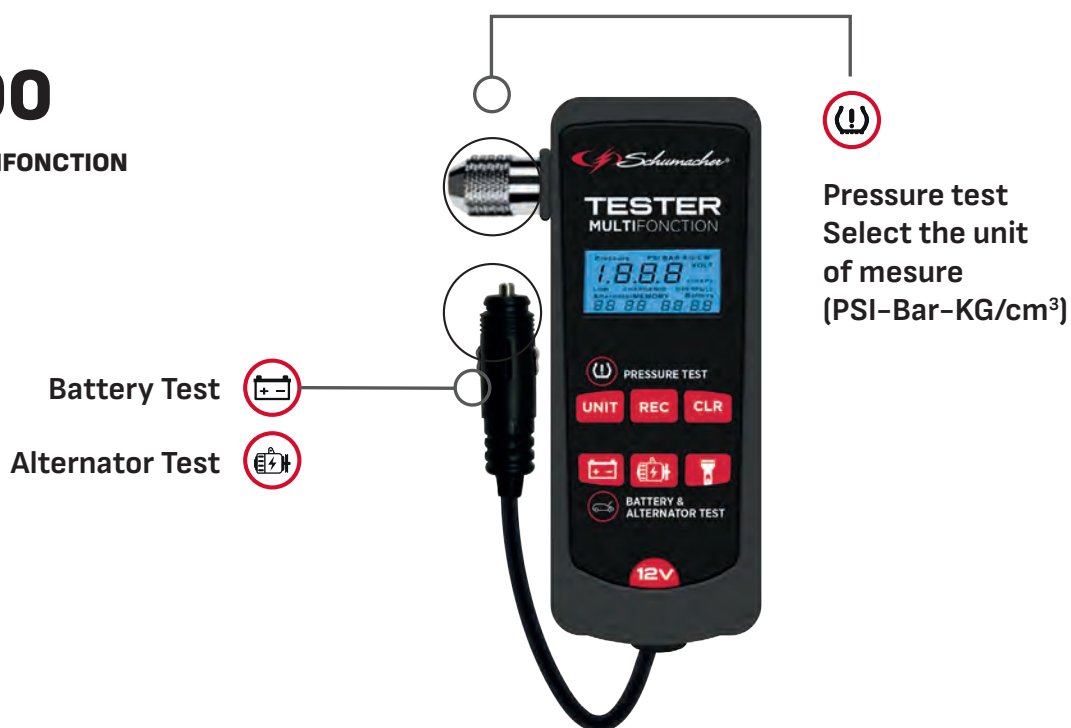

TECHNICAL INFORMATION

MODEL	XP 200	BT55
	Pressure test - Battery test - Alternator test	Voltmeter and alternator tester
Part number	825900100	940261175
Type of battery	lead-acid batteries	lead-acid batteries
Operating range	12 V	6 - 12 V
Power supply	Internal battery - 1x Alcaline 9V	/

BT55

TESTER



ENJOY A JOB WELL DONE

MACHINES

Discover our welding machines with power from 10 up to 180 A.

HELMETS

The design is the result of an ergonomics' study, with particular attention to the internal space that makes our mask easy to use and comfortable to wear, fully protecting face and neck.

ACCESSORIES

We offer a wide range of accessories, including welding goggles, adjustable welding headgear, leather protective gloves, chipping ammer with brush, welding hammer, stainless steel welding hammer, heart clamp (with optional copper spindle), magnetic position holder (58 or 92 mm).



WELDING ENVIRONMENT

WELDING POST

SCH & M RANGE



MODEL		SCH P130	SCH P160	SCH P160 PLUS	M 120NG	
Part number		S2000100	S2000201	S2000707	S2020404	
Type		MMA	MMA	MMA	MMA - MIG (NO GAS)	
Welding current		10 -130 A	10 - 160 A	10 - 180 A	30 - 120 A	
Absorption (75%)		2,55 kw	3,0 kw	4,0 kw	3,00 kw	
Input voltage		1 ph - 230 V	1 ph - 230 V	1 ph - 230 V	1 ph - 230 V	
Frequency		50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	
Duty cycle 40°C	60%	120 A	140 A	160 A	40 %	120 A
	100%	93 A	108 A	124 A	100 %	76 A
Open circuit voltage		52 V	52 V	80 V	60 V	
Fuse		16 A	16 A	16 A	16 A	
Generator power		6 kVA	7,5 kVA	10 kVA	6 kVA	
Dinse		25 mmq	25 mmq	25 mmq	25 mmq	
Insulation class		H	H	H	F	
Protection degree		IP21S	IP21S	IP21S	IP21	
ACCESSORIES INCLUDED						
Electrode holder		√	√	√	√	
Earth clamp		√	√	√	√	
Cables		√	√	√	√	
Manual mask		√	√	√	-	
Galets		-	-	-	0,8 - 1,0	

WELDING ENVIRONMENT

WELDING ACCESSORIES



MODEL	LV1220	LV1620	LV1820
Part number	S6000000	S6011101	S6022202
Viewing area (mm)	90 x 34	92,5 x 42,5	100 x 59,5
Cartridge size (L x W x h / mm)	110 x 90 x 9	110 x 90 x 9	133 x 114 x 10
Arc sensor	2	2	4
Light shade	DIN 3	DIN 4	DIN 4
Dark shade	DIN 11	DIN (9-13)	DIN (5-9) - (9-13)
Power on/off	ON/OFF AUTOMATIC	ON/OFF AUTOMATIC	ON/OFF AUTOMATIC
Uv/ir protection	DIN 16	DIN 16	DIN 16
Power supply	SOLAR CELLS	SOLAR CELLS	SOLAR CELLS
Switching time	5/10,000 s	3/10,000 s	1/10,000 s
Operating temp.	-5° C up to +55° C	-5° C up to +55° C	-5° C up to +55° C
Protection degree	1/1/1/3	1/1/1/1	1/1/1/1
True color	/	√	√
ACCESSORIES			
External screen	40095	40095	40096
Filter model	40097	40098	40099



GLOVES	
Part number	S2AA0825
Description	Leather protective gloves - Premium - Size 10



HOLDER		
Part number	S2AA0913	S2AA0914
Description	Magnetic position holder 58 mm - 4kg (capacity) - 4Pcs	Magnetic position holder 92 mm - 23kg (capacity) - 1Pcs



WELDING WIRE IN REELS					
Part number	570804D10S	550807D10S	550607D10S	540907D10S	560807D10S
Description	•Aluminium magnesium •0,8mm •0.4Kg •Class. AWS A5.1	•Steel •0,8 mm •0.7Kg •Class. AWS A5.18 ER 70S-6	•Steel •0,6 mm •0.7Kg •Class. AWS A5.18 ER 70S-6	•Steel •0,8 mm •0.7Kg •Class. AWS A5.18 ER 70S-6	•Stainless steel •0,8 mm •0.7Kg •Class. AWS A5.9 ER 308L-SI



STICK ELECTRODE					
Part number	502530029S	502030054S	512530070S	501630040S	503235066S
Description	Rutile 2,5 mm x 300 mm 29 PCS	Rutile 2 mm x 300 mm 54 PCS	Base 2,5 mm x 300 mm 70 PCS	Rutile 1,6 mm x 300 mm 40 PCS	Rutile 3,2 mm x 350 mm 66 PCS



Global Brand Schumacher Electric, headquartered in Dallas/Fort Worth, TX, is known for industry-leading innovation, an unwavering commitment to quality, and producing products that represent a remarkable value.

With an owned, vertically integrated global supply chain, including plants in China, Mexico and Belgium, Schumacher designs and produces a full complement of power converting products including battery chargers, testers, maintainers, jump starters, portable power, lithium and electric vehicle charging as well as custom transformers for the electronics industry. For 75 years, Schumacher has been powering lifestyles with products sold in markets around the world.

With a legacy centered on delivering product excellence and exceptional service. That's why customers trust Schumacher.



SCHUMACHER EUROPE
Rue de la Baronnerie 3,
4920 Harzé, Belgium

   
@schumacherboosters

info-be@schumacherelectric.com
www.schumachereurope.com
+32 4 388 20 17